

# MANAGEMENT SYSTEM CERTIFICATE

Certificate No:  
190927-2015-AQ-NOR-NA

Initial certification date:  
28 June 2002

Valid:  
28 June 2017- 28 June 2020

This is to certify that the management system of

## Fibo AS

Industriveien 2, 4580 Lyngdal, Norway

has been found to conform to the Quality Management System standard:  
**ISO 9001:2015**

This certificate is valid for the following scope:

**Design, development, manufacture and sale of wood based panels included accessories for interior and construction, in addition to trade with laminates, panels, worktops and laminate flooring.**

Place and date:  
Høvik, 19 June 2017



For the issuing office:  
DNV GL – Business Assurance  
Veritasveien 1, 1363 Høvik, Norway

**Jøran Laukholm**  
Management Representative

# PEFC CHAIN OF CUSTODY CERTIFICATE

Certificate No:  
194143-2016-AE-NOR-NA

Initial certification date:  
14 October 2013

Valid:  
14 October 2018 - 14 October 2023

This is to certify that the Chain of Custody system of

## **Fibo AS**

Industriveien 2, 4580 Lyngdal, Norway

has been found to conform to the requirement of:

### **PEFC ST 2002:2013 – Chain of Custody of Forest Based Products**

This certificate is valid for the following scope:

**Design, development, manufacture and sale of wood based panels including accessories for interior and construction, in addition to trade with laminates, panels, worktops and laminate flooring according to percentage based method.**

Place and date:  
Høvik, 24 August 2018



For the issuing office:  
DNV GL – Business Assurance  
Veritasveien 1, 1363 Høvik, Norway

Jøran Laukholm  
Management Representative

## ENVIRONMENTAL PRODUCT DECLARATION

in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the Declaration	Fibo AS
Program operator	The Norwegian EPD Foundation
Publisher	The Norwegian EPD Foundation
Declaration number	NEPD00281E
ECO EPD Ref. No.	00000146
Issue date	19.11.2014
Valid to	19.11.2019

**Fibo wall panels**  
**Fibo AS**

[www.epd-norge.no](http://www.epd-norge.no)

**Fibo**



## General information

### Product

Fibo wall panels

### Program holder

The Norwegian EPD Foundation  
Post Box 5250 Majorstuen, 0303 Oslo  
Phone: +47 23 08 82 92  
e-mail: [post@epd-norge.no](mailto:post@epd-norge.no)

### Declaration number:

NEPD00281E

### This declaration is based on Product Category Rules:

CEN Standard EN 15804 serve as core PCR  
NPCR010 (12/2013)

### Declared unit:

Production of 1 m<sup>2</sup> wall panel with an thickness of 10.2 mm

### Declared unit with option:

1 m<sup>2</sup> wall panel with an thickness of 10.2 mm and an expected lifetime of 20 years.

### Functional unit:

### The EPD has been worked out by:

Lars G. F. Tellnes  
Norwegian Institute of Wood Technology

 **Treteknisk** 

### Verification:

Independent verification of data, other environmental information and EPD has been carried out in accordance with ISO14025, 8.1.3 and 8.1.4

externally  internally



Christofer Skaar, PhD  
(Independent verifier approved by EPD Norway)

### Owner of the declaration

Fibo AS  
Contact person: Kevin Hægeland  
Phone: +47 38 34 33 00  
e-mail: [kha@fibosystem.com](mailto:kha@fibosystem.com)

### Manufacturer

Fibo  
Industriveien 2, NO-4580 Lyngdal  
Norway

### Place of production:

Lyngdal, Norway

### Management system:

NS-EN ISO 9001:2008, PEFC ST 2002:2013

### Org. No:

NO 964 193 991 MVA

### Issue date

19.11.2014

### Valid to

19.11.2019


### Comparability:

EPD of construction products may not be comparable if they do not comply with EN 15804 and are seen in a building context.

### Year of study:

2013-2014

Approved



Dagfinn Malnes  
Managing Director of EPD-Norway

### Declared unit:

Production of 1 m<sup>2</sup> wall panel with an thickness of 10.2 mm

Key environmental indicators	Unit	Cradle to gate A1 - A3	Transport *****	Module C4
Global warming	kg CO <sub>2</sub> -eqv	2,97 <sup>†</sup>	0,04	14,54 <sup>†</sup>
Energy use	MJ	417	0,75	162
Dangerous substances	*	-	-	-
Share of renewables in energy use	%	35	1	76
Indoor air classification	-	Not measured	-	-

<sup>†</sup> Includes sequestration/emissions of 12 kg CO<sub>2</sub> through photosynthesis (A1-A3)/combustion (C4).

\* The product contains no substances from the REACH Candidate list or the Norwegian priority list

\*\*\*\*\* Transport from production site to central warehouse in Norway. See explanation on page 7.

## Product

### Product description:

Fibo wall panels are a waterproof panel system based on plywood covered with high-pressure laminate (HPL) on the front and a thinner layer of HPL on the back.

Fibo wall panels can be used as water proof layer on walls in bathrooms. The panels are also suitable for wardrobes, washing rooms, cleaning rooms, laboratories, commercial kitchen, sport facilities, camping sites, hotels, schools, etc.

### Product specification

Wall panels are made both as bathroom panels in a size of 60 cm x 240 cm and as kitchenboard in a size of 60 cm x 58 cm.

Materials	kg	%
Plywood	6,3	74,56
High-pressure laminates	1,62	19,17
Glue	0,33	3,91
Wood packaging	0,14	1,66
Plastic packaging	0,06	0,71
Total	8,45	100

### Technical data:

Plywood have 7 layers of veener in accordance to NS-EN 13986 with water resistant glue, a thickness of 9 mm and a density of 700 kg/m<sup>3</sup>. HPL in accordance to EN 438-3 with thickness on 0,7 mm fronside and 0,5 mm on the backside. The density of the HPL is 1350 kg/m<sup>3</sup>.

Standard format is 2400 mm x 600 mm with an thickness of 10,2 mm and a density of 790 kg/m<sup>3</sup>.

### Market:

Norway and North-Europe. The scenarios are based on the Norwegian market.

### Reference service life:

Expected lifetime is 20 years.


## LCA: Calculation rules

### Declared unit with option:

1 m<sup>2</sup> wall panel with an thickness of 10.2 mm and an expected lifetime of 20 years.

### System boundary:

Flow chart of the production (A3) of wall panels at Fibo-Trespo are shown below, while the rest of the modules are shown on page 5. Modul D is calculated by energy substitution and is explained in the scenarios.

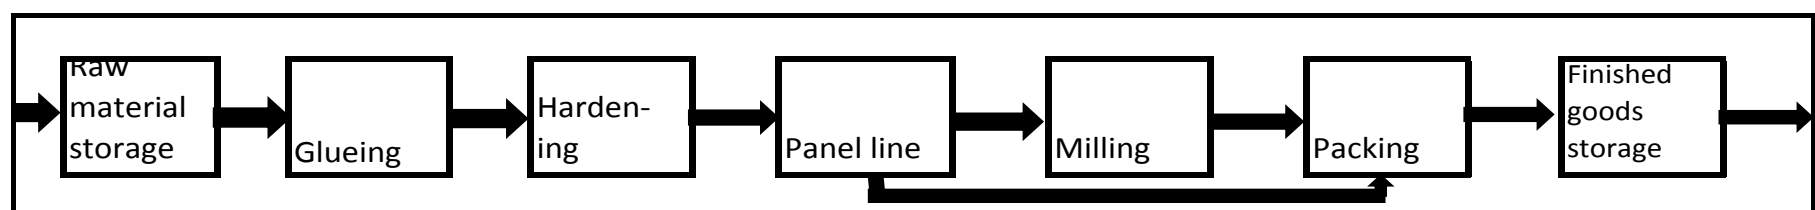

### Data quality:

Production data for Fibo is based on the average in 2013. Data for production and incineration of HPL is collected from a EPD from 2012 and that is compliant with EN 15804. Data for the production of plywood and transport is collected from Ecoinvent v2.2 released in 2010. The generic production data for plywood was controlled with specific data from one supplier and found representative, but the glue type was changed in the inventory to phenol-formaldehyde. The waste incineration of plywood is with data from ELCD 3.0, released in 2013.

### Cut-off criteria:

All major raw materials and all the essential energy is included. The production process for raw materials and energy flows that are included with very small amounts (<1%) are not included. This cut-off rule does not apply for hazardous materials and substances.

### Allocation:

Allocation is done in accordance to NS-EN 15804:2012. In the production chain of wood, this is economic allocation and the values used are the default in Ecoinvent v2.2.

### Calculation of biogenic carbon:

Sequestration and release of biogenic carbon is calculated according to EN 16449:2014. For plywood this is calculated to be 1136 kg CO<sub>2</sub> per m<sup>3</sup>, which gives 10,23 per DE. For HPL is assumed 1,66 kg CO<sub>2</sub> per kg paper and then it is estimated that 66% of the HPL is paper, which gives 1,77 kg CO<sub>2</sub> per DE. In total 12 kg CO<sub>2</sub> per DE is sequestered in A1-A3 and emitted in C4.

### Estimates and assumptions:

All key assumptions and estimates are either presented in the EPD or can be found in NPCR010 (12/2013)

## LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transport to building site is based on a scenario with transport from the factory to a builders' merchant in Oslo and then an additional 20 km to a building site.

### Transport from production place to user (A4)

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Value (l/t)
Truck	75	Lorry, >32t, EURO4	400	0,026 l/tkm	10,4
Truck	39	Lorry, 3,5-7,5t, EURO4	20	0,11 l/tkm	2,2

It is assumed 1 MJ of electricity use at building site and that 10% of the wall panels are wasted. Also aluminium profiles and sealing compound are used in installation.

### Installation in the building (A5)

	Unit	Value
Auxiliary aluminium profile and sealing	kg	0,05
Water consumption	m <sup>3</sup>	
Electricity consumption	MJ	0,1
Other energy carriers	MJ	
Material loss	kg	0,845
Output materials from waste treatment	kg	
Dust in the air	kg	

### Replacement (B4)/Refurbishment (B5)

	Unit	Value
Replacement cycle*	År	20
Electricity consumption	kWh	
Replacement of worn parts		

\* Number or RSL (Reference Service Life)

Transport of waste to treatment is based on the average in 2007 on 85 km. The type of vehicle is the same as used for construction waste scenarios in Ecoinvent v2.2.

### Transport to waste processing (C2)

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Value (l/t)
Truck	50	Lastebil, 20-32t	85	0,05 l/tkm	4,25

Benefits beyond life cycle is based on the substitution of energy production as a result of exported energy from energy recovery in A5/C4. The energy production that is substituted is Norwegian electricity consumption mix for electric energy and Norwegian district heating mix for thermal energy.

Wall panels are collected as mixed construction waste at building site and treated with incineration with energy recovery. All disposal activities are included in C4, while C3 have no technical activity.

### Benefits and loads beyond the system boundaries (D)

	Unit	Value
Substitution of electric energy	MJ	18
Substitution of thermal energy	MJ	54

### End of Life (C1, C3, C4)

	Unit	Value
Hazardous waste disposed	kg	
Collected as mixed construction waste	kg	8,25
Reuse	kg	
Recycling	kg	
Energy recovery	kg	8,25
To landfill	kg	

## LCA: Results

The results for global warming potential in A1-A3 have large contribution from the sequestration of 12 kg carbon dioxide during wood growth, the same amount are accounted as emitted during waste incineration in C4.

### System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Product stage		Construction installation stage			Use stage							End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Construction installation stage	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	MND	MND	MND	MND	MND	MNR	MNR	X	X	X	X	X

### Environmental impact

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP	kg CO <sub>2</sub> -eqv	2,97E+00	4,36E-01	2,09E+00	1,19E-03	1,37E-01	0,00E+00	1,46E+01	-7,92E-01
ODP	kg CFC11-eqv	8,29E-07	7,08E-08	1,14E-07	1,06E-10	2,22E-08	0,00E+00	2,11E-08	-8,92E-08
POCP	kg C <sub>2</sub> H <sub>4</sub> -eqv	7,66E-03	5,71E-05	9,09E-04	1,42E-07	2,63E-05	0,00E+00	3,26E-04	-1,16E-04
AP	kg SO <sub>2</sub> -eqv	6,46E-02	1,70E-03	8,60E-03	2,77E-06	7,51E-04	0,00E+00	5,43E-03	-2,29E-03
EP	kg PO <sub>4</sub> <sup>3-</sup> -eqv	1,25E-02	3,45E-04	1,56E-03	5,77E-07	1,65E-04	0,00E+00	1,11E-03	-5,00E-04
ADPM	kg Sb-eqv	2,04E-05	1,41E-06	2,84E-06	3,62E-09	3,24E-07	0,00E+00	-3,45E-07	-1,25E-06
ADPE	MJ	2,69E+02	6,60E+00	3,19E+01	1,60E-02	2,03E+00	0,00E+00	4,92E+00	-1,11E+01

**GWP** Global warming potential; **ODP** Depletion potential of the stratospheric ozone layer; **POCP** Formation potential of tropospheric photochemical oxidants; **AP** Acidification potential of land and water; **EP** Eutrophication potential; **ADPM** Abiotic depletion potential for non fossil resources; **ADPE** Abiotic depletion potential for fossil resources

### Resource use

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
RPEE	MJ	1,48E+02	1,02E-01	2,78E+01	1,06E-01	2,65E-02	0,00E+00	1,24E+02	-4,64E+01
RPEM	MJ	1,23E+02					0,00E+00	-1,23E+02	
TPE	MJ	2,71E+02	1,02E-01	2,78E+01	1,06E-01	2,65E-02	0,00E+00	1,14E-01	-4,64E+01
NRPE	MJ	2,69E+02	7,42E+00	3,58E+01	2,20E-02	2,28E+00	0,00E+00	3,82E+01	-1,40E+01
NRPM	MJ	3,26E+01					0,00E+00	-3,26E+01	
TRPE	MJ	3,01E+02	7,42E+00	3,58E+01	2,20E-02	2,28E+00	0,00E+00	5,61E+00	-1,40E+01
SM	kg						0,00E+00		
RSF	MJ	2,71E-04		2,71E-05			0,00E+00	2,25E-07	
NRSF	MJ	9,12E-04		9,13E-05			0,00E+00	7,56E-07	
W	m <sup>3</sup>	2,95E+01	5,94E-01	8,74E+00	3,77E-02	1,53E-01	0,00E+00	5,28E-02	-1,21E+01

**RPEE** Renewable primary energy resources used as energy carrier; **RPEM** Renewable primary energy resources used as raw materials; **TPE** Total use of renewable primary energy resources; **NRPE** Non renewable primary energy resources used as energy carrier; **NRPM** Non renewable primary energy resources used as materials; **TRPE** Total use of non renewable primary energy resources; **SM** Use of secondary materials; **RSF** Use of renewable secondary fuels; **NRSF** Use of non renewable secondary fuels; **W** Use of net fresh water

### End of life - Waste

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
HW	kg	3,66E-02	1,94E-04	7,23E-03	6,12E-07	4,45E-05	0,00E+00	5,97E-02	-1,43E-03
NHW	kg	8,25E+00	5,51E-02	8,79E-01	1,00E-03	1,48E-02	0,00E+00	6,05E-02	-3,25E-01
RW	kg	3,85E-03	6,17E-06	3,98E-04	9,59E-08	1,64E-06	0,00E+00	1,81E-05	-3,59E-05

**HW** Hazardous waste disposed; **NHW** Non hazardous waste disposed; **RW** Radioactive waste disposed

### End of life - Output flow

Parameter	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
CR	kg								
MR	kg								
MER	kg								
EEE	MJ			1,60E+00				1,60E+01	-1,76E+01
ETE	MJ			4,90E+00				4,90E+01	-5,40E+01

**CR** Components for reuse; **MR** Materials for recycling; **MER** Materials for energy recovery; **EEE** Exported electric energy; **ETE** Exported thermal energy

Reading example:  $9,0 \text{ E-03} = 9,0 \cdot 10^{-3} = 0,009$

## Additional Norwegian requirements

### Electricity

Norwegian consumption mix at medium voltage is used at the production site and is calculated based on the average for 2008-2010, with some adjustment to be equal to emission factors published by EPD-Norway.

Greenhouse gas emissions: 0,0117 kg CO<sub>2</sub> - eqv/MJ

### Dangerous substances

None of the following substances have been added to the product: Substances on the REACH Candidate list of substances of very high concern (of 16.06.2014) or substances on the Norwegian Priority list (of 11.11.2013) or substances that lead to the product being classified as hazardous waste. The chemical content of the product complies with regulatory levels as given in the Norwegian Product Regulations.

### Transport

Transport from production site to central warehouse in Norway is: 50 km

This transport scenario is not realistic, but is calculated this way based on requirements from EPD-Norway.

### Indoor environment

Test for the emissions from the product to the indoor environment have not been performed.

According to SINTEF Technical approval nr. 2289, the product have been evaluated not to release particles, gases or radiation that gives an negative impact on the the indoor climate or have health implications.




### Carbon footprint

Carbon footprint has not been worked out for the product.



## Bibliography

ISO 14025:2006	<i>Environmental labels and declarations - Type III environmental declarations - Principles and procedures</i>
ISO 14044:2006	Environmental management - Life cycle assessment - Requirements and guidelines
EN 15804:2012	<i>Sustainability of construction works - Environmental product declaration - Core rules for the product category of construction products</i>
ISO 21930:2007	<i>Sustainability in building construction - Environmental declaration of building products</i>
Tellnes, L. G. F.	<i>LCA-report for Fibo-Trespo. LCA-report nr. 321143-1 from Norwegian Institute of Wood Technology, Oslo, Norway.</i>
NPCR010 (12/2013)	<i>Product category rules for building boards, december 2013. The Norwegian EPD Foundation, Oslo, Norway.</i>
NS-EN 16485:2014	<i>Round and sawn timber - Environmental Product Declaration - Product category rules for wood and wood-based products for use in construction.</i>
NS-EN 16449:2014	<i>Wood and wood-based products - Calculation of the biogenic carbon content of wood and conversion to carbon dioxide.</i>
ICDLI (2012)	<i>EPD Decorative High-Pressure Laminates. International Committee of the Decorative Laminates Industry (ICDLI).</i>
Ecoinvent v2.2 (2010)	<i>European Centre of Life Cycle Inventories. <a href="http://www.ecoinvent.ch">http://www.ecoinvent.ch</a></i>
ELCD 3.0 (2013)	<i>European reference Life-Cycle Database. <a href="http://eplca.jrc.ec.europa.eu/ELCD3/">http://eplca.jrc.ec.europa.eu/ELCD3/</a></i>
NS-EN 13986:2004	<i>Wood-based panels for use in construction - Characteristics, evaluation of conformity and marketing</i>
NS-EN 438-3:2005	<i>High-pressure decorative laminates (HPL) - Sheets based on thermosetting resins (usually called Laminates) - Part 3: Classification and specification of laminates less than 2 mm thick intended for bonding to supporting substrates</i>

 <b>epd-norge.no</b> The Norwegian EPD Foundation	<b>Program holder and publisher</b> The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo Norway	Phone: +47 23 08 82 92  e-mail: <a href="mailto:post@epd-norge.no">post@epd-norge.no</a> web: <a href="http://www.epd-norge.no">www.epd-norge.no</a>
	<b>Owner of the declaration</b> Fibo AS Industriveien 2, 4580 Lyngdal Norway	Phone: +47 38 34 33 00 Fax: +47 38 34 33 11 e-mail: <a href="mailto:ordre@fibosystem.com">ordre@fibosystem.com</a> web: <a href="http://www.fibosystem.com">www.fibosystem.com</a>
	<b>Author of the Life Cycle Assessment</b> Lars G. F. Tellnes Norsk Tretknisk Institutt P.B. 113 Blindern, NO-0314, Oslo, Norway	Phone: +47 98 85 33 33 Fax: e-mail: <a href="mailto:firmapost@tretknisk.no">firmapost@tretknisk.no</a> web: <a href="http://www.tretknisk.no">www.tretknisk.no</a>